



RING TYPE WRAPPING MACHINE



AUTOMATIC STRETCHING AND WINDING MACHINE HAS LOW INVESTMENT COST, HIGH COMPETITIVENESS, AND CAN ENSURE LOW POWER CONSUMPTION, LOW MAINTENANCE, HIGH RELIABILITY AND LONG SERVICE LIFE.

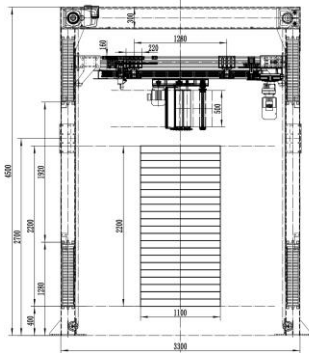

LAYOUT SIZE DRAWING (MM)

- MODULAR DESIGN
- FLEXIBLE WRAPPING
- FAST AND FLEXIBLE SETTINGS
- DYNAMIC PROTECTION DEVICE
- REDUCE TOTAL OPERATING COSTS
- MAXIMIZE CONSUMPTION SAVINGS



FAST, EFFICIENT, FLEXIBLE AND ECONOMICAL WRAPPING MACHINE

Item	Unit	Parameter
Min-Max pallet dimensions	Mm	500-600*1100/ Customizable
Min-Max pallet height	Mm	500~2000
Output capacity	Pallt/hour	50~120
Pre-stretch ratio included	%	150~300
Power supply voltage	V	380-400-415±5%
Power supply frequency	Hz	50
Air pressure	Bar	6
Air consumption	NI/min	250~350
Reel height	Mm	500
Max reel diameter	Mm	260
Cardboard reel height	Mm	510
Film thickness workable	Um	14~30
Adhesive side		Internal